

MODEL GS1

Modular • Extruded Aluminum Grille Screen

STANDARD MATERIALS AND CONSTRUCTION

- FRAME:** .125" thick; 6063-T6/T52 extruded aluminum alloy
- BLADES:** .125" thick; 6063-T6/T52 extruded aluminum alloy
- BLADE SPACING:** 2" - 12" vertical and horizontal
- ASSEMBLY:** Welded
- FINISH:** Mill

OPTIONS



.125" - .250" Nominal Thickness (Frame and/or Blade)
Grille Depth 1" - 6"

NOTES


1. A = 2" - 12" Horizontal Blade Spacing
- B = 2" - 12" Vertical Blade Spacing
- C = .125" - .250" Material Thickness
- D = 2" - 6" Grille Depth

GRILLE SCREEN SIZES

Panels	Min Panel	Max Single Panel
GS1	12"W x 12"H	60"W x 96"H 40 sq.ft.

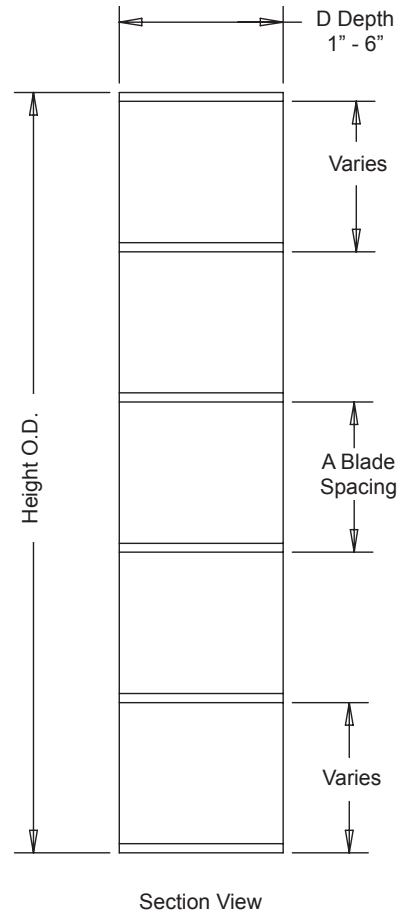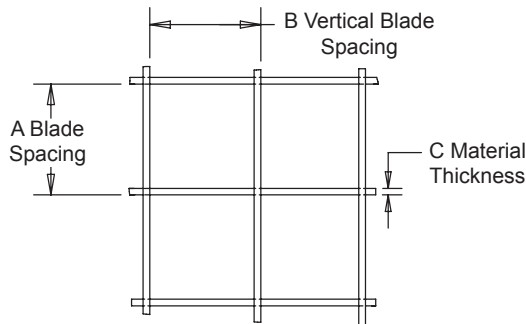


Channel Frame



Angle Frame



Optional Frames

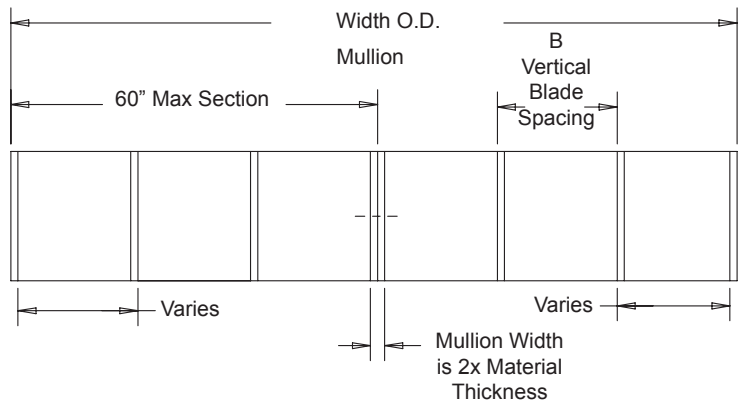

Dampers Louvers
UL Life Safety Products
Division of Mestek
Member of AMCA

MODEL GS1

Modular • Extruded Aluminum Grille Screen

This page intentionally left blank.

air balance

Dampers  Louvers
UL Life Safety Products
Division of Mestek
Member of AMCA