


# Insulated Blank-Off Panels

## NOTES

**Aluminum Louvers:** 22-GA aluminum skins with styrofoam insulation  
**Steel Louvers:** 20-GA galvanized steel skins with styrofoam insulation

Insulated blank-off panels can be used to blank off all or portions of louver.  
Blank-off panels can be mounted on the front or rear face of louver.  
Customer to provide blank-off dimensions and mounting location when ordering.  
Screens are not typically used when blank-offs are installed unless otherwise specified.

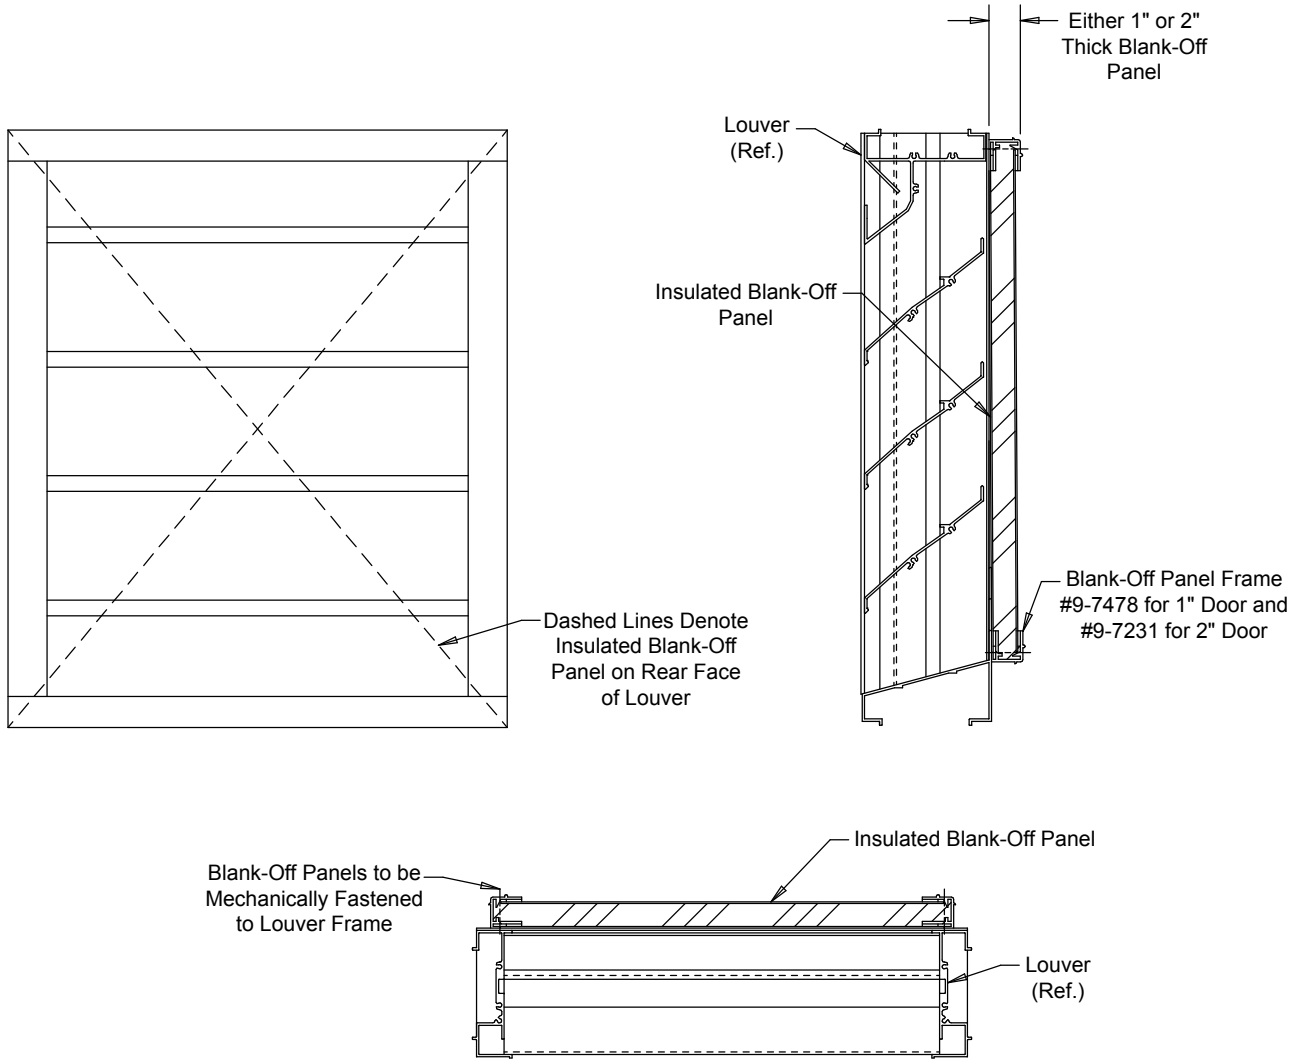

# Insulated Blank-Off Panels

---

This page intentionally left blank.