

MODEL ESV-34

Equipment Screen Louver • 4" Deep • Chevron Blades • Vertical • Sight Proof • Extruded Aluminum

Standard Materials and Construction

FRAME: .081" thick (nominal) extruded aluminum 6063-T52/T6 alloy.

BLADE: .081" thick (nominal) extruded aluminum 6063-T52/T6 alloy. Blades spaced approximately 3" on center with architectural hidden mullions.

SUPPORTS: Shall incorporate rear angle 2" x 2" x 1/4" extruded aluminum to withstand windload of 20 PSF, approximately 90 mph wind. Supports vary as required, per wind load. Spaced approximately 60" on centers.

FINISH: Mill

Options

Variations - Mitered Corner, Post Corner, Hinged Access, and Cap Covers.



Finishes - Kynar, Baked Enamel, Clear and Color Anodize (Consult the factory for details.)

Notes

1. "Maximum panel size should not exceed 60 sq. ft. or 120"W x 72"H. Louver sections larger than the factory maximum size will require field assembly of smaller sections.
2. Approximate shipping weight is 4.5 lbs./sq.ft.

Screen Sizes

Min Panel	Max Single Panel
12"W x 12"H	120"W x 72"H (60 sq.ft.)

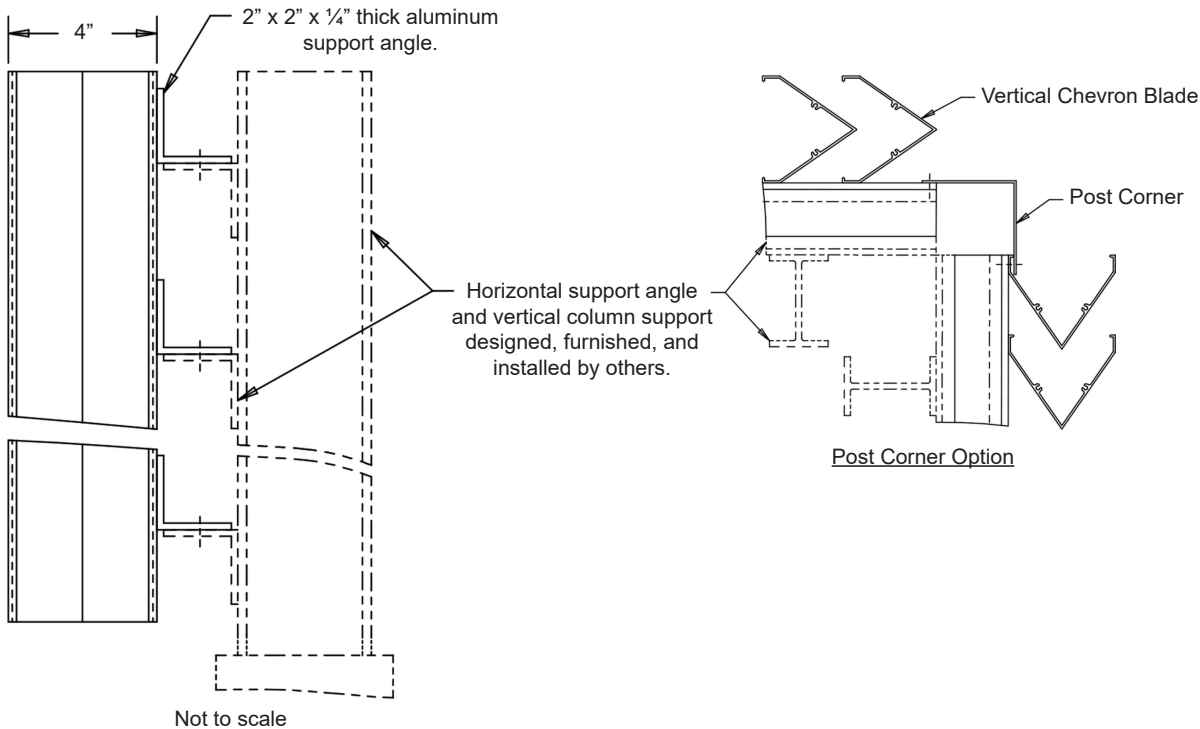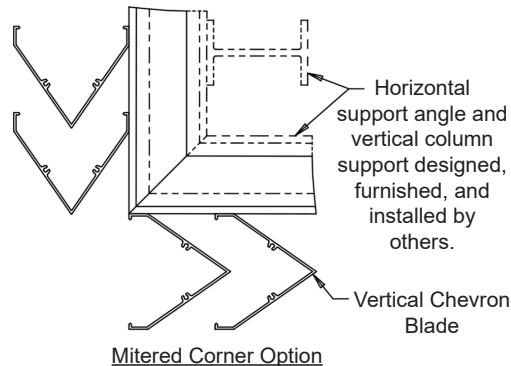

Item #	Qty	Height	Width	Mullion	Mitered	Post	Union Made
					Corner Type		
Arch. / Eng. :		EDR:		ECN:	Job:		
Contractor:		Date:		DWN:	DWG:		
Project:							