



ARROW INDUSTRIAL DAMPER FOR PROCESS-CONTROL

MODEL 423

FOR USE UP TO 10" W.G. STATIC PRESSURE @ 2500 F.P.M.

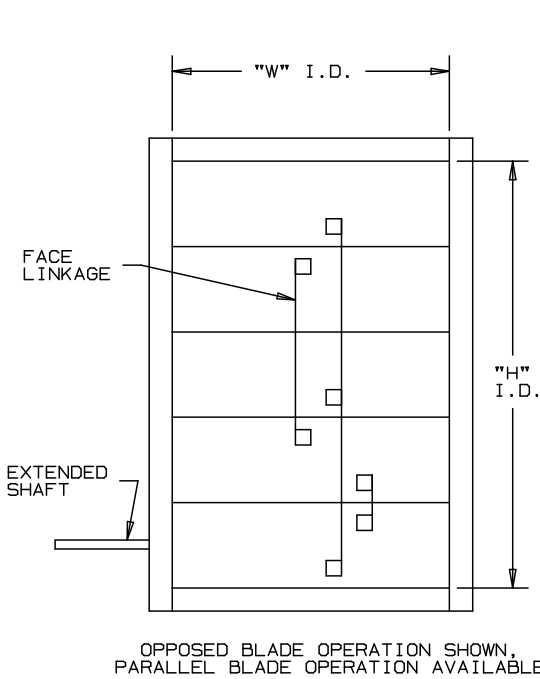

OPPOSED BLADE OPERATION SHOWN,
PARALLEL BLADE OPERATION AVAILABLE

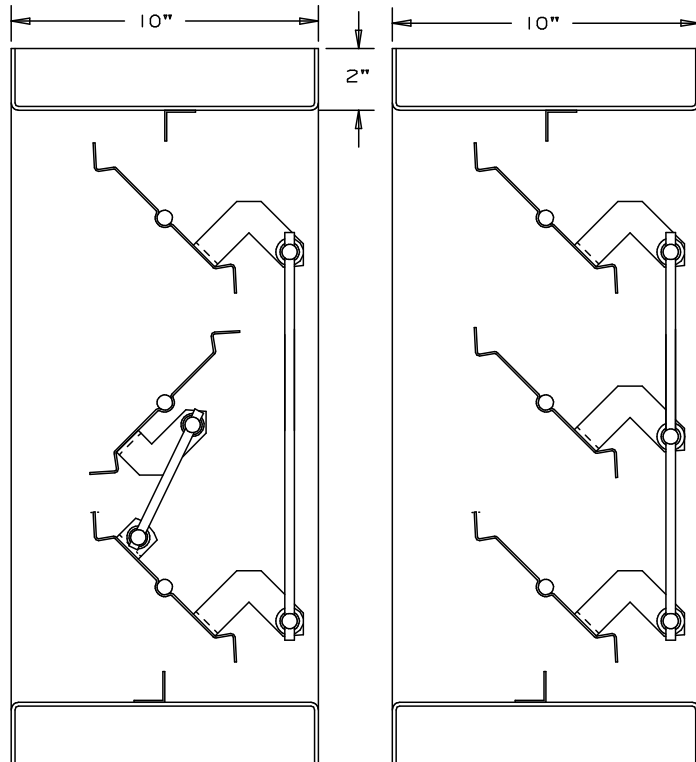

OPPOSED BLADES

PARALLEL BLADES

NOT TO SCALE

FOR PERFORMANCE DATA
- SEE REVERSE SIDE

VELOCITIES ABOVE 2500 FPM TO
4000 FPM MAXIMUM SHALL REQUIRE
A DOUBLE SET OF FACE LINKAGE

SEE PRICE LIST FOR OPTIONAL EXTRAS

OPTIONAL EXTRAS

CONSTRUCTION MAY BE WITH OTHER THAN
STANDARD MATERIALS WHEN REQUIRED TO
MEET SPECIAL CONDITIONS AS TEMPERATURE,
PRESSURE, VELOCITY, SYSTEM ENVIRONMENT
OR OTHER SPECIFICATIONS.

LISTED BELOW ARE SOME OPTIONS USED FOR
THE MORE COMMON TYPES OF APPLICATIONS.

1. NEOPRENE BLADE EDGE SEALS
2. STAINLESS STEEL JAMB SEALS
3. FLANGES OTHER THAN STANDARD
(2") UP TO 3 1/2"
4. PAINTED FINISHES
5. PERIMETER HOLES-ONE FLANGE
6. PERIMETER HOLES-BOTH FLANGES
7. OTHER MATERIALS
8. EXTERNAL LINKAGE
9. OTHER BEARINGS



UNION MADE

STANDARD SPECIFICATIONS

FRAME: 2"x10"x2" - 12 GA. GALVANIZED STEEL FORMED
CHANNEL FRAME, MECHANICALLY FASTENED
TOGETHER.

BLADE: 10 GA. GALVANIZED PRESS FORMED SINGLE
THICKNESS TO MAXIMUM 48" LENGTH, WELDED TO
SHAFT. BLADE WIDTH - MAXIMUM 9 3/4",
MINIMUM 6 3/4".

SHAFTS: CORROSION RESISTANT, PLATED COLD FINISHED
STEEL STUB. 3/4" DIA. TO 48" LENGTH.
DRIVE BLADE TO BE CONTINUOUS LENGTH.

BEARINGS: BRONZE OILITE FLANGED SLEEVE PRESSED
INTO FRAME.


LINKAGE: CHEVRON TYPE FORMED BRACKET OF 1/8" THICK
STEEL. TRUNNION IS A MACHINED PIVOT OF
PLATED STEEL WITH A 5/16" DIAMETER ROD.

FINISH: FACTORY MILL.

MAXIMUM TEMPERATURE: 250°F

MAXIMUM PANEL SIZE: 48" x 96" I.D. OF DAMPERS
WITHOUT SEALS
48" x 72" I.D. OF DAMPERS
WITH SEALS

MINIMUM PANEL SIZE: 6" x 6 3/4" I.D. (SINGLE BLADE)
6" x 15" I.D. (OPPOSED BLADES)



ARROW UNITED INDUSTRIES
A DIVISION OF MESTEK, INC.

450 RIVERSIDE DRIVE
WYALUSING, PA 18853

TEL: (570) 746-1888 FAX: (570) 746-9286
WEB ADDRESS: WWW.ARROWUNITED.COM

AGENT: _____

ARCH./ENG.:

CONTR.:

PROJECT:

EDR: ECN: JOB:

DATE: DWN.: DWG.:

741-D-JULY-2005-1

ARROW MODEL 423 INDUSTRIAL DAMPER PERFORMANCE DATA

LEAKAGE :

AIR LEAKAGE QUANTITIES SHOWN IN THE CHART ARE RESULTS OF TESTS PER AMCA STANDARD 500 AND ARE SHOWN AT 1" W.G. DIFFERENTIAL PRESSURE AND CORRECTED TO .075 LB./CU.FT. AIR DENSITY.

AIR LEAKAGE (TOTAL C.F.M.)

		DAMPER WIDTH (INCHES)						
		12"	18"	24"	30"	36"	42"	48"
DAMPER HEIGHT (INCHES)	12"	7	10	13	17	20	23	27
	24"	13	20	27	33	40	47	54
	36"	20	30	40	50	60	70	80
	48"	27	40	54	67	80	94	107
	60"	33	50	67	84	100	117	134
	72"	40	60	80	100	121	141	161


FOR DETERMINING LEAKAGE VALUES GREATER THAN 1" W.G. TO A MAXIMUM OF 10" W.G. USE THE MULTIPLIER CORRECTION CHART BELOW.

STATIC PRESSURE (IN)	2	3	4	5	6	7	8	9	10
MULTIPLIER CORRECTION FACTOR	1.4	1.7	2.1	2.5	2.8	3.2	3.6	4.1	4.5

AIR LEAKAGE RATINGS ARE BASED ON AMCA STANDARD 500 USING TEST SET UP 5.4 WITH A DAMPER CLOSING TORQUE APPLIED TO THE DAMPER OF 30 IN.LBS./SQ.FT. OF DAMPER AREA FOR A SIZE 48" x 72", WITH A MINIMUM OF 50 IN.LBS./SQ.FT. OF DAMPER AREA FOR A SIZE 48" x 6 3/4"

DAMPER AIR LEAKAGE SHOWN IS BASED UPON PUBLISHING ONLY THE MOST CONSERVATIVE LEAKAGE RESULTS FOR THE ARROW MODEL 423 INDUSTRIAL DAMPER FOR AN ENTIRE RANGE OF DAMPER SIZES.


TO ENSURE PROPER DAMPER OPERATION AND AIR LEAKAGE PERFORMANCE FOR THIS DAMPER DESIGN, THE STATIC PRESSURE/BLADE LENGTH LIMITS SHOWN PROVIDE THE USER WITH THIS INFORMATION AND IN ADDITION PROVIDES A REALATIONSHIP BETWEEN DAMPER COST AND THE APPLICATION.

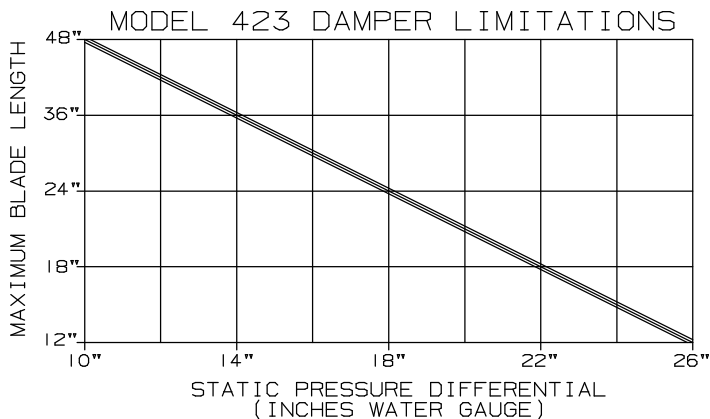

THE MODEL 423 DAMPER DESIGN AT A BLADE LENGTH OF 48" HAS A MAXIMUM ALLOWABLE BLADE DEFLECTION OF L/360 FOR THE STATIC PRESSURE INDICATED ON THE CHART. AT REDUCED BLADE LENGTHS HIGHER STATIC PRESSURE LIMITS CAN BE ATTAINED WITHOUT SACRIFICING DAMPER OPERATING AND PERFORMANCE CHARACTERISTICS.


ARROW MODEL 423 INDUSTRIAL DAMPER PERFORMANCE DATA

ARROW MODEL 423 (OPPOSED BLADE) 42" x 42" I.D.
PRESSURE DROP vs. DUCT VELOCITY

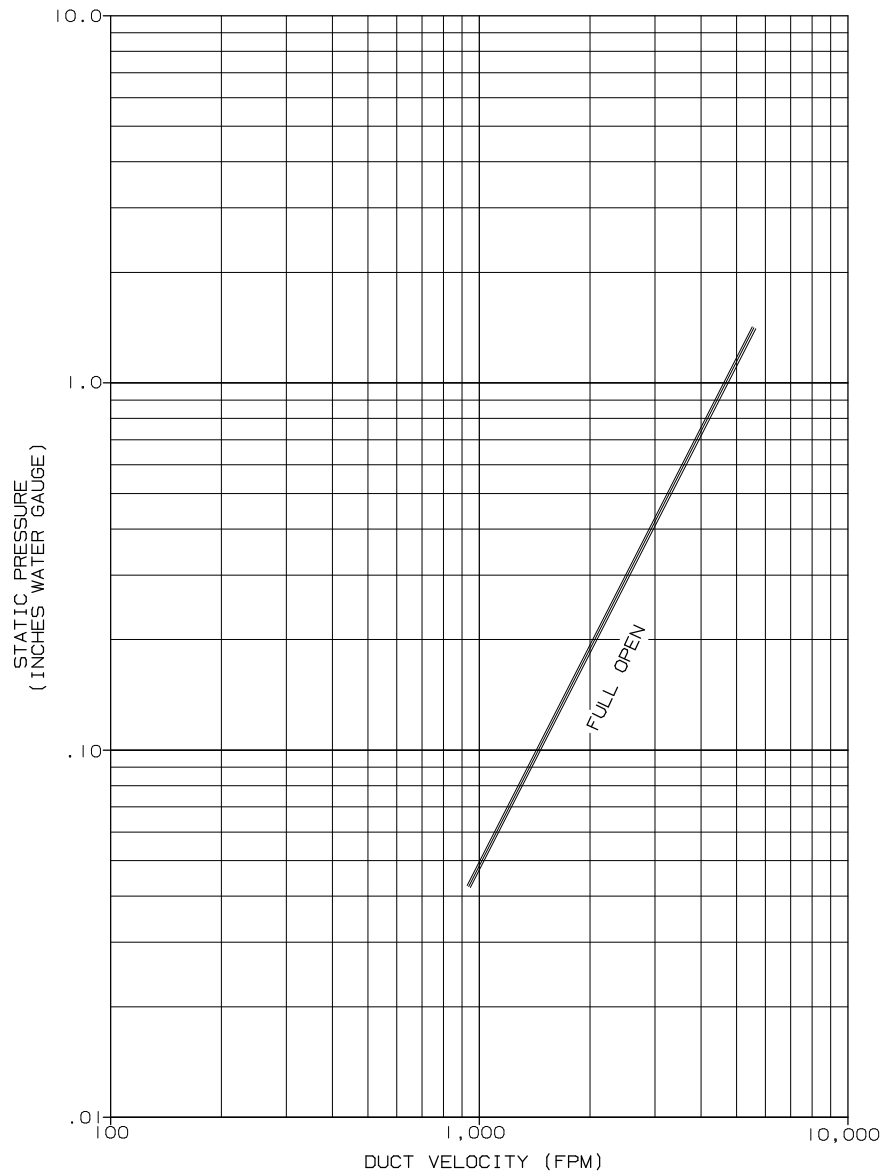

PRESSURE DROP CURVES LISTED ARE BASED ON AMCA 500, USING
TEST SET UP FIGURE 5.3 FOR DAMPER INSTALLED WITH DUCT UPSTREAM AND
DOWNSTREAM. STATIC PRESSURES ARE CORRECTED TO .075 LB./CU. FT.
AIR DENSITY.


NOTES:

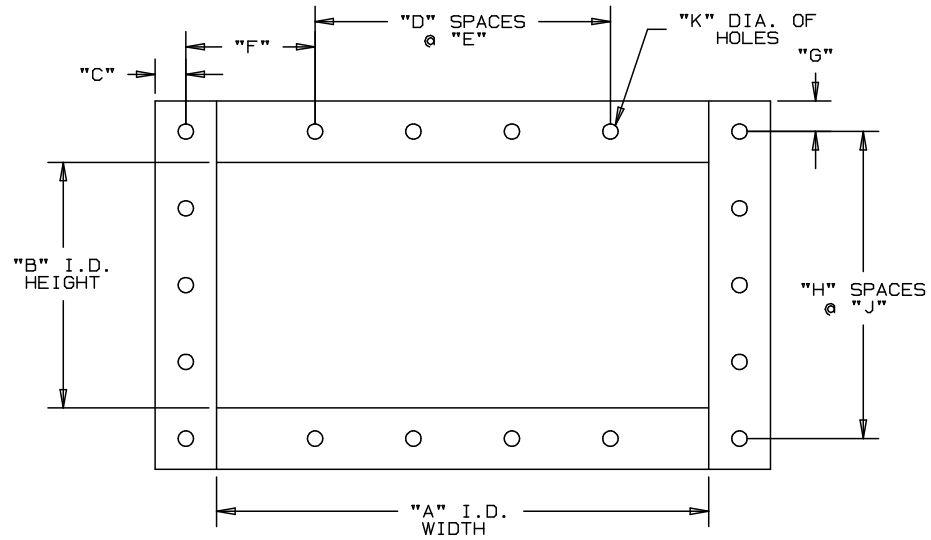

ITEM	QUANTITY	PARALLEL	OPPOSED	I.D. (WIDTH) "A"	I.D. (HEIGHT) "B"	"C"	"D"	"E"	"F"	"G"	"H"	"J"	"K"	"L"	"M"	HAND QUADRANT	MOTOR LEVER ARM	VARIATIONS

SHIP TO: _____ INVOICE TO: _____ PURCHASE ORDER: _____

MARK SHIPMENT: _____

SEND ORDER TO:

ARROW UNITED INDUSTRIES
 A DIVISION OF MESTEK, INC.
 450 RIVERSIDE DRIVE
 WYALUSING, PA 18853
 TEL: (570) 746-1888 FAX: (570) 746-9286
 WEB ADDRESS: WWW.ARROWUNITED.COM