

Hydronic Buffer Tank

STANDARD FEATURES

- 4- 1-1/2" NPT Female Thread
- Inner Tank SUS304 Stainless
- 3/4" Female Water Drain SS Plug
- Insulation: Polyurethane Resin Form
- White Outer Galvanized Steel Housing

OPTIONAL FEATURE

- 3kW Electric Heaters (2) (consult factory for lead time)

MODEL: BT-26 (H) Qty. _____

PART NO.:
BT-26

CAPACITY:
26 Gallons

HEATER CAPACITY (OPTIONAL):
6kW (3kW w/Heater)

MODEL: BT-40 (H) Qty. _____

PART NO.:
BT-40

CAPACITY:
40 Gallons

HEATER CAPACITY (OPTIONAL):
6kW (3kW w/Heater)

OPTIONAL 3kW HEATER

PART NO.:
BT-26-H


OPTIONAL 3kW HEATER

PART NO.:
BT-40-H




Standard Buffer Tank (No Heat Option)

Dimension	BT-26	BT-40
-A-	43.25	58.25
-B-	35.88	50.75
-C-	23.13	32.25
Capacity, US Gal	26	40

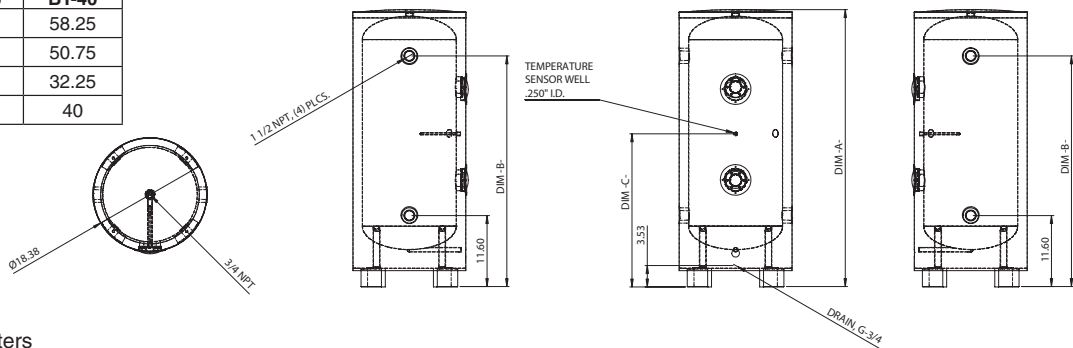

Buffer Tank w/3kW Heaters

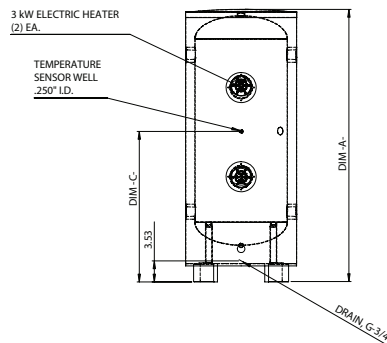

Dimension	BT-26-H	BT-40-H
-A-	43.25	58.25
-B-	35.88	50.75
-C-	23.13	32.25
Capacity, US Gal	26	40
Heat Capacity, kW	6.0	6.0
Min. Circuit Ampacity at 480V	30.0	30.0



260 North Elm St., Westfield, MA 01085
 (800) 465-8558 Fax: (413) 564-5815
 7555 Tranmere Drive, Mississauga, ONT. L5S 1L4 Canada
 (905) 670-5888 Fax: (905) 670-5782
 www.designlineonline.com

PROJECT: _____ DATE: _____

LOCATION: _____

CUSTOMER: _____

ENGINEER: _____

SUBMITTED BY: _____

FOR: Reference Approval Construction

UNIT DESIGNATION: _____

SCHEDULE NUMBER: _____