

# Extruded Aluminum Louver

**EG3C**

Solar Angular Continuous Line • Grille Screen

**STANDARD CONSTRUCTION**

- FRAME:** .125" thick; 6063-T6/T52 extruded aluminum alloy
- BLADES:** .125" thick; 6063-T6/T52 extruded aluminum alloy
- BLADE SPACING:** 2" - 12" vertical and horizontal
- ASSEMBLY:** Welded
- FINISH:** Mill

**OPTIONS**




- .125" - .250" Nominal Thickness (Frame and/or Blade)
- Blade Angle from 0° - 45°
- Grille Depth 2" - 6"

**NOTES**

1. A = 2" - 12" Horizontal Blade Spacing
- B = 2" - 12" Vertical Blade Spacing
- C = .125" - .250" Material Thickness
- D = 2" - 6" Grille Depth
- E = 0° - 45° Blade Angle
- F = 1" Minimum Vertical Blade Depth

**GRILLE SIZE**

Panels	Min Panel	Max Single Panel
GS3C	12"W x 12"H	60"W x 96"H 40 sq.ft.

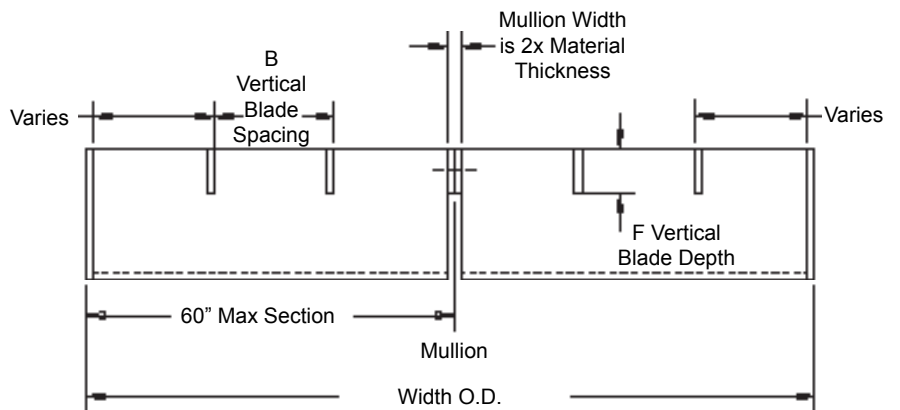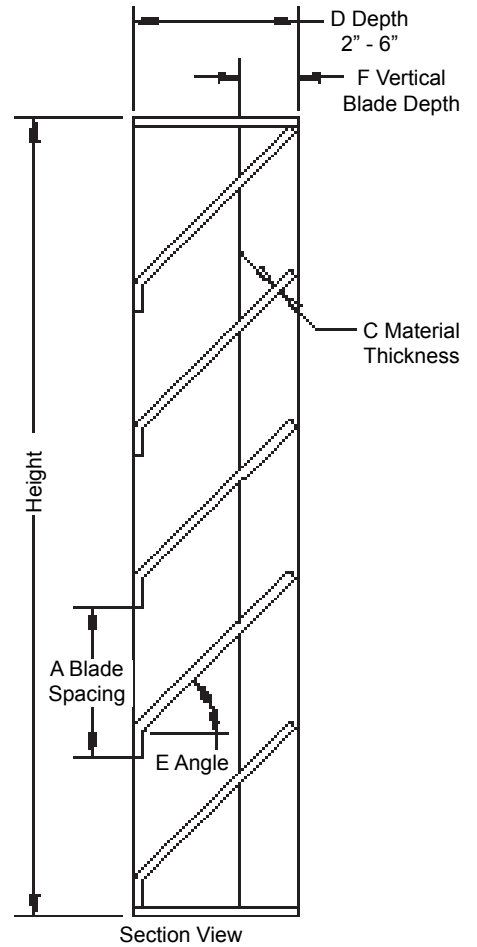

**Louvers & Dampers**  
A Microtek Company

This page intentionally left blank.