


# AIRLINE™

## L O U V E R S

### AS4S45PHP Interior Fastening Installation

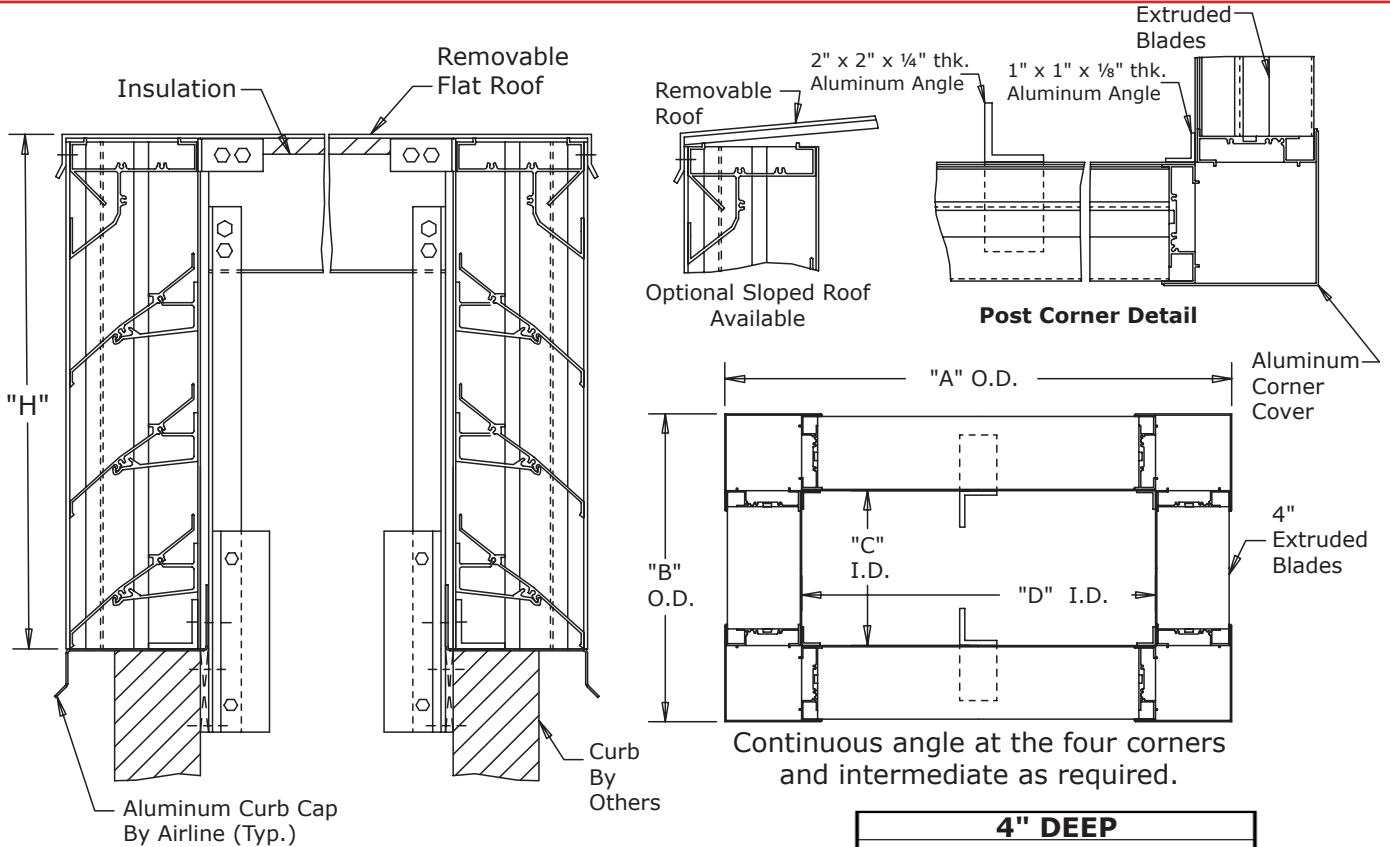

**4" DEEP**  
**AS4S45PHP "J/K" Blade**

**FRAME:**

Extruded Aluminum sections of ( ) .081", ( ) .125" thickness of 6063-T52-T6 alloy, with reinforcing rib bosses.

**Roof:**

Removable roof .060" thick sheet aluminum, reinforced with aluminum bracing where required to take a snow load of 40 lbs./sq.ft., plus a required safety factor.

**Screens:**

(When indicated)


Bird Screen - 1/2" square mesh, 19 ga. galvanized steel, on interior.

**Insulation**

Underside of roof is lined with 1/2" thick insulation.

**Notes:** Penthouse dimensions "A" or "B" exceeding 84" shall be shipped in sections for field assembly by others.


ITEM	QTY	"A"	"B"	"C"	"D"	"H"	MULL	SCREENS	
								TYPE	LOC
PROJECT:							LOCATION:		
ARCH/ENGR:							CONTRACTOR:		
REPRESENTATIVE:							DATE:		



# AIRLINE™

## L O U V E R S

### AS4S45PHP Exterior Fastening Installation

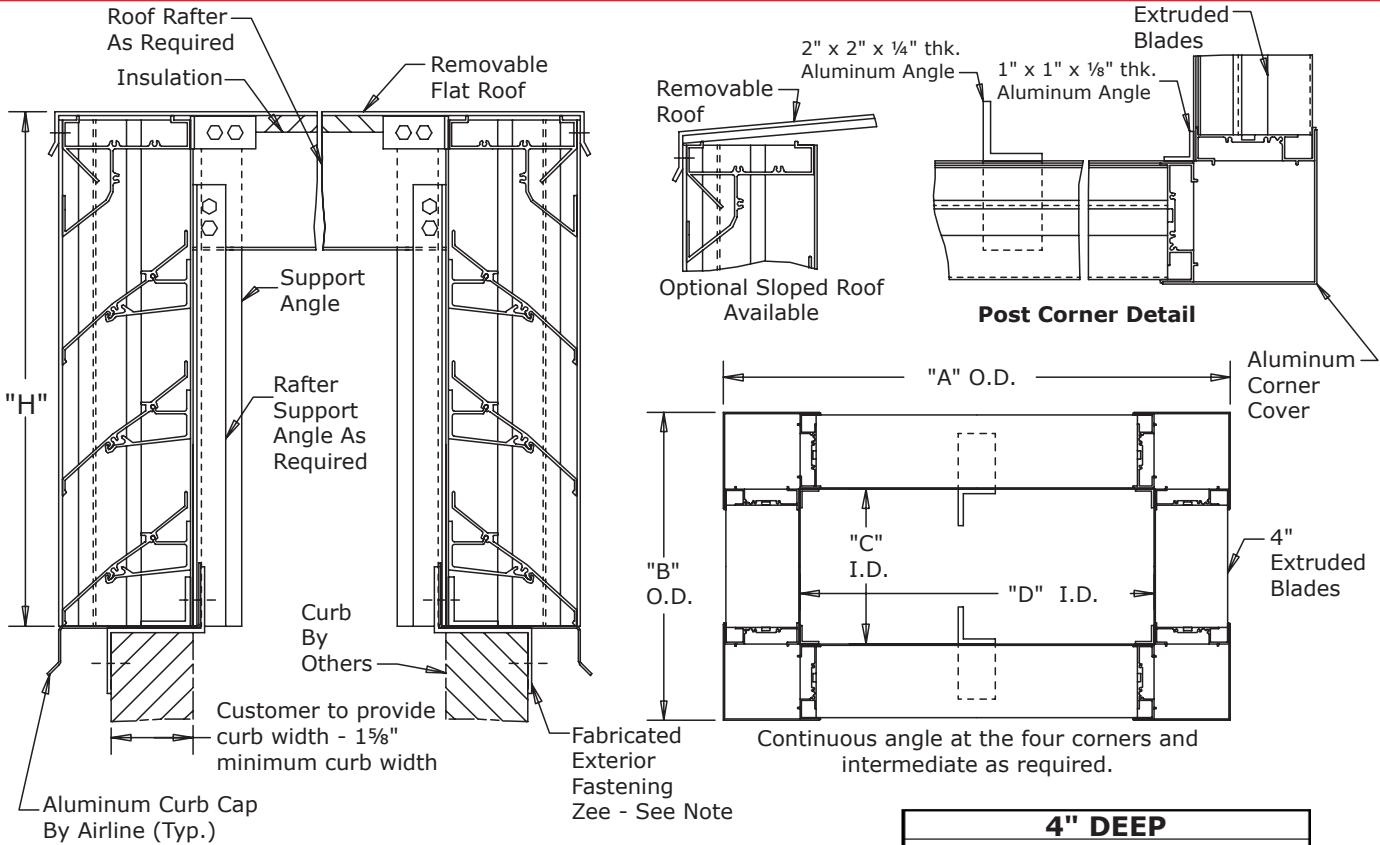

**Note:** Exterior mounting Zee Clip supplied 2" long, spaced no more than 4" from each corner and 12" O.C. maximum.

**4" DEEP**  
**AS4S45PHP "J/K" Blade**

**FRAME:**

Extruded Aluminum sections of ( ) .081", ( ) .125" thickness of 6063-T52-T6 alloy, with reinforcing rib bosses.

**Roof:**

Removable roof .060" thick sheet aluminum, reinforced with aluminum bracing where required to take a snow load of 40 lbs./sq.ft., plus a required safety factor.

**Screens:**

(When indicated)  
Bird Screen - 1/2" square mesh, 19 ga. galvanized steel, on interior.

**Insulation**

Underside of roof is lined with 1/2" thick insulation.

**Notes:** Penthouse dimensions "A" or "B" exceeding 84" shall be shipped in sections for field assembly by others.

ITEM	QTY	"A"	"B"	"C"	"D"	"H"	MULL	SCREENS		
								TYPE	LOC	
<b>PROJECT:</b>							<b>LOCATION:</b>			
<b>ARCH/ENGR:</b>							<b>CONTRACTOR:</b>			
<b>REPRESENTATIVE:</b>							<b>DATE:</b>			

