

Hydronic Buffer Tank

STANDARD FEATURES

- 4- 1-1/2" NPT Female Thread
- Inner Tank SUS304 Stainless
- 3/4" Female Water Drain SS Plug
- Insulation: Polyurethane Resin Form
- White Outer Galvanized Steel Housing

OPTIONAL FEATURE

- 3kW Electric Heaters (2) (consult factory for lead time)




MODEL: BT-26 (H) Qty. _____
PART NO.:
 BT-26
CAPACITY:
 26 Gallons
HEATER CAPACITY (OPTIONAL):
 6kW (3kW w/Heater)

MODEL: BT-40 (H) Qty. _____
PART NO.:
 BT-40
CAPACITY:
 40 Gallons
HEATER CAPACITY (OPTIONAL):
 6kW (3kW w/Heater)


OPTIONAL 3kW HEATER
PART NO.:
 BT-26-H

OPTIONAL 3kW HEATER
PART NO.:
 BT-40-H

Standard Buffer Tank (No Heat Option)

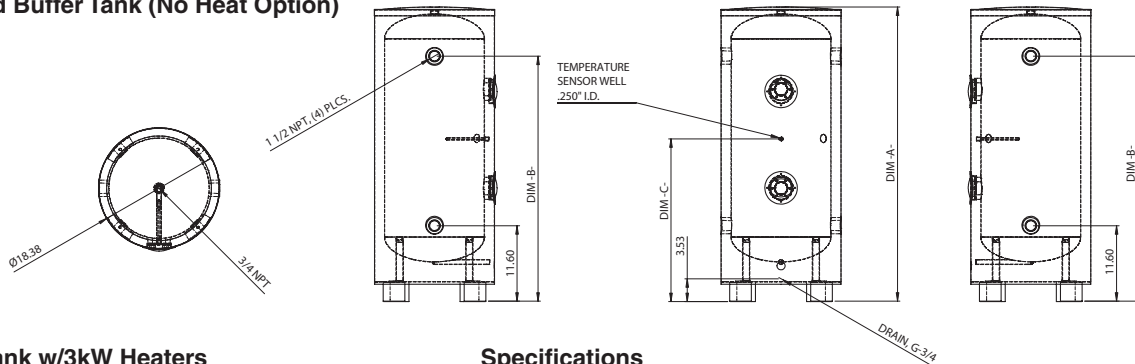

Buffer Tank w/3kW Heaters

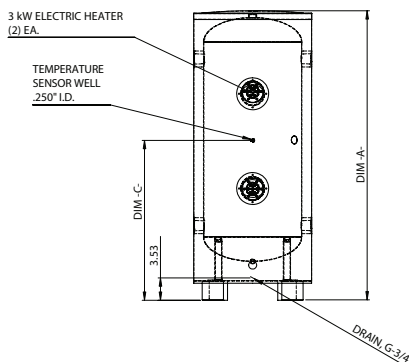

Specifications

		BT-26(H)	BT-40(H)
Dimensions	-A-	43-1/4	58-1/4
	-B-	35-7/8	50-3/4
	-C-	23-1/8	32-1/4
Capacity	Gal	26	40
Max Water Flo	GPM	24	
Heat Capacity*	kW	6	
Min. Circuit at 480V*	Amp	30	
Ship Weight	Lbs	84	104
Weight Empty	Lbs	77	97
Weight Full**	Lbs	278	390

* For tanks with heat option only.

** Based upon 30% Propylene Glycol solution.



260 North Elm St., Westfield, MA 01085
 (800) 465-8558 Fax: (413) 564-5815

7555 Tranmere Drive, Mississauga, ONT. L5S 1L4 Canada
 (905) 670-5888 Fax: (905) 670-5782

www.spacepak.com

PROJECT: _____ **DATE:** _____

LOCATION: _____

CUSTOMER: _____

ENGINEER: _____

SUBMITTED BY: _____

FOR: Reference Approval Construction

UNIT DESIGNATION: _____

SCHEDULE NUMBER: _____