

Low Temperature Fan Coil

STANDARD FEATURES

- Low Temperature - Max 160°F Operating Temperature
- DC motor w/ variable speed modulation using EC motor driver
- Motorized adjustable louvers
- Quiet operation (33-58 dB)
- Elegant modern design
- Heating / cooling operation
- Stainless steel flexible hose connections
- LED Display / Remote Control
- Control up to 32 secondary units
- Condensate hose

OPTIONAL EQUIPMENT

- 3-way valves
- External Thermostat Setup
- 4-pipe configuration (consult factory for lead time)



			Part Number		
			HW-06-ECM	HW-15-ECM	HW-18-ECM
			Quantity		
Air	Total Air Flow	CFM	294	379	515
			218	262	435
			171	218	335
Cooling*	Cooling Capacity	BTU/h	7300	10614	13106
Heating**	Heating Capacity	BTU/h	14266	20853	25734
Sound	At outlet	dB(A)	48	54	58
	Fan Motor Power	Watts	18	26	30
Electrical	Voltage		120V		
	Fan Motor Running Current	Amps	0.30	0.40	0.55
Hydronic	Cooling Water Flow Rate	GPM	1.4	2.0	2.5
	Cooling Pressure Drop	PSI	3.25	3.86	2.64
	Heating Water Flow Rate	GPM	1.4	2.0	2.5
	Heating Pressure Drop	PSI	2.6	3.03	2.12
	Water Content	Gal	0.02	0.03	0.05
Low Temperature - Max Operating Temp			160°F		
Construction & Packing Data	Water Connections	Type	NPT Threaded Female		
			1/2"		
	Condensate Drainage Connection		5/8"		
	Dimensions	Length	34 7/16"		
		Width	8 2/3 "		
		Height	11 13/16"		
Net Weight			26.5 lbs	28.7 lbs	30.9 lbs

*at 80°F ambient, 45°F supply water

**at 70°F ambient, 160°F supply water



260 North Elm St., Westfield, MA 01085
(800) 465-8588 Fax: (413) 564-5815

7555 Tranmere Drive, Mississauga, ONT. L5S 1L4 Canada
(905) 670-5888 Fax: (905) 670-5782

www.spacepak.com

PROJECT: _____ DATE: _____

LOCATION: _____

CUSTOMER: _____

ENGINEER: _____

SUBMITTED BY: _____


FOR: Reference Approval Construction

UNIT DESIGNATION: _____

SCHEDULE NUMBER: _____

SUBMITTAL DATA: HIGHWALL HEATING/COOLING FAN COIL

Dimensional data - HW-06/15/18-ECM

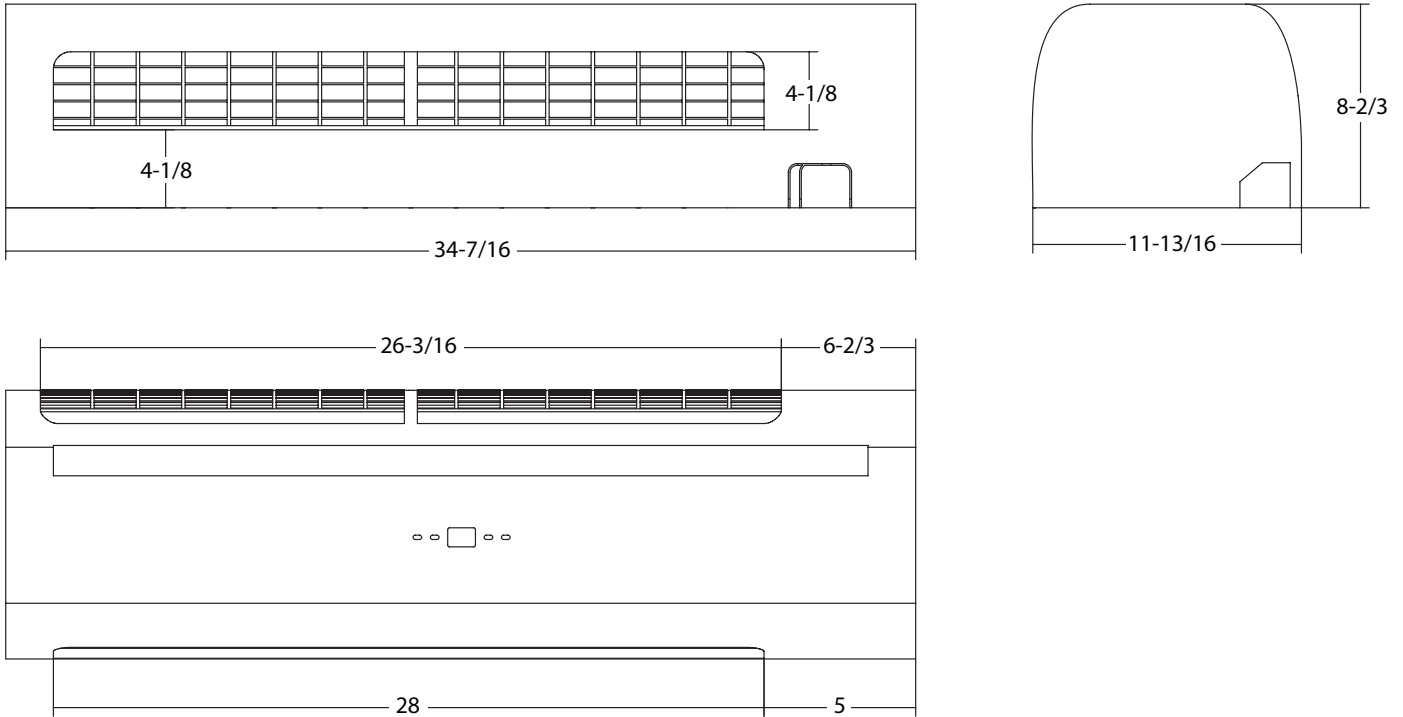

Model	Output (BTU/h)					
	Heating			Cooling		
	Entering Water Temperature					
	120°F	140°F	160°F	45°F	47°F	50°F
HW-06-ECM	8123	11331	14266	7300	6416	5085
HW-15-ECM	11843	16553	20853	10614	9420	7475
HW-18-ECM	14641	20444	25734	13106	11638	9249

