



Vertical Unit Heaters – Submittal

VVSD-6

Dimensional Data



(4) MOUNTING HOLES 3/8\"/>



(4) MOUNTING HOLES 1/2\"/>

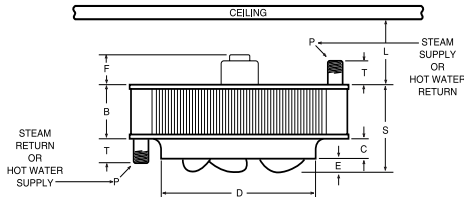


FIGURE A

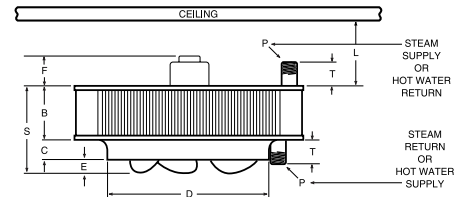


FIGURE B

FIGURE A — MODEL “VV” UNIT HEATER ROUGHING-IN DIMENSIONS

Unit Capacity (MBH)	Fan Dia. inches (mm)	A inches (mm)	B inches (mm)	C inches (mm)	D inches (mm)	E inches (mm)	F inches (mm)	G inches (mm)	H inches (mm)	K inches (mm)	L Min inches (mm)	P NPT inches (mm)	R inches (mm)	S inches (mm)	T inches (mm)	U inches (mm)	V inches (mm)	Approx. Ship Wt. lbs (kg)
40	11-1/4 (286)	18-1/4 (464)	4-5/8 (117)	1-1/4 (32)	11-3/4 (298)	3/4 (19)	4 (102)	11 (279)	1-3/8 (35)	1-7/8 (48)	7 (178)	1-1/2 (38)	3-5/8 (92)	6-5/8 (168)	2-3/4 (70)	11 (279)	3-5/8 (92)	32 (15)
62	13-1/2 (343)	21-1/4 (540)	4-5/8 (117)	1-5/8 (41)	14 (356)	1 (25)	4 (102)	14 (356)	1-3/8 (35)	1-7/8 (48)	7 (178)	1-1/2 (38)	3-5/8 (92)	7-1/8 (181)	2-3/4 (70)	14 (356)	3-5/8 (92)	40 (18)
77	13-1/2 (343)	21-1/4 (540)	6-1/8 (156)	1-5/8 (41)	14 (356)	1 (25)	3 (76)	14 (356)	1-3/8 (35)	1-7/8 (48)	7 (178)	1-1/2 (38)	3-5/8 (92)	8-5/8 (219)	2-3/4 (70)	14 (356)	3-5/8 (92)	43 (20)

FIGURE B — MODEL “VV” UNIT HEATER ROUGHING-IN DIMENSIONS

Unit Capacity (MBH)	Fan Dia. inches (mm)	A inches (mm)	B inches (mm)	C inches (mm)	D inches (mm)	E inches (mm)	F inches (mm)	G inches (mm)	H inches (mm)	K inches (mm)	L Min inches (mm)	P NPT inches (mm)	R inches (mm)	S inches (mm)	T inches (mm)	U inches (mm)	V inches (mm)	Approx. Ship Wt. lbs (kg)
104	16-3/4 (425)	25-1/4 (641)	6-1/8 (156)	2 (51)	17-1/2 (445)	1-1/8 (29)	3 (76)	17 (432)	1-3/8 (35)	2-3/4 (70)	7 (178)	1-1/2 (38)	4-1/8 (105)	9-1/8 (232)	2-3/4 (70)	17 (432)	4-1/8 (105)	63 (29)
125	16-3/4 (425)	25-1/4 (641)	6-1/8 (156)	2 (51)	17-1/2 (445)	1-3/4 (44)	3 (76)	17 (432)	1-3/8 (35)	2-3/4 (70)	7 (178)	1-1/2 (38)	4-1/8 (105)	9-3/4 (248)	2-3/4 (70)	17 (432)	4-1/8 (105)	64 (29)
144	19-3/4 (502)	29-1/2 (749)	6-1/8 (156)	2-3/8 (60)	20-5/8 (524)	1-1/4 (32)	4 (102)	20-1/2 (521)	1-3/4 (44)	3-1/2 (89)	7 (178)	2 (51)	4-1/2 (114)	9-5/8 (244)	2-3/4 (70)	20-1/2 (521)	4-1/2 (114)	80 (36)
164	19-3/4 (502)	29-1/2 (749)	6-1/8 (156)	2-3/8 (60)	20-5/8 (524)	1-3/4 (44)	4 (102)	20-1/2 (521)	1-3/4 (44)	3-1/2 (89)	7 (178)	2 (51)	4-1/2 (114)	10-1/8 (257)	2-3/4 (70)	20-1/2 (521)	4-1/2 (114)	80 (36)
200	19-3/4 (502)	29-1/2 (749)	7-5/8 (194)	2-3/8 (60)	20-5/8 (524)	2 (51)	4 (102)	20-1/2 (521)	1-3/4 (44)	3-1/2 (89)	7 (178)	2 (51)	4-1/2 (114)	12 (305)	2-3/4 (70)	20-1/2 (521)	4-1/2 (114)	86 (39)
237	25-1/4 (641)	37-1/2 (953)	7-5/8 (194)	3 (76)	26-3/8 (670)	1 (25)	3-1/2 (89)	28 (711)	1-3/4 (44)	3-1/2 (89)	7 (178)	2 (51)	4-3/4 (121)	11-5/8 (295)	2-3/4 (70)	18 (457)	9-3/4 (248)	134 (61)
285	25-1/4 (641)	37-1/2 (953)	7-5/8 (194)	3 (76)	26-3/8 (670)	1-1/4 (32)	3-1/2 (89)	28 (711)	1-3/4 (44)	3-1/2 (89)	7 (178)	2 (51)	4-3/4 (121)	11-3/4 (298)	2-3/4 (70)	18 (457)	9-3/4 (248)	139 (63)
317	25-1/4 (641)	37-1/2 (953)	7-5/8 (194)	3 (76)	26-3/8 (670)	2-1/8 (54)	4 (102)	28 (711)	1-3/4 (44)	3-1/2 (89)	7 (178)	2 (51)	4-3/4 (121)	12-3/4 (324)	2-3/4 (70)	18 (457)	9-3/4 (248)	139 (63)
367	25-1/4 (641)	37-1/2 (953)	9-1/8 (232)	3 (76)	26-3/8 (670)	2 (51)	3-1/2 (89)	28 (711)	1-3/4 (44)	3-1/2 (89)	7 (178)	2 (51)	4-3/4 (121)	14-1/8 (359)	2-3/4 (70)	18 (457)	9-3/4 (248)	146 (66)
495	30-1/2 (775)	42 (1067)	9-1/8 (232)	3-1/2 (89)	31-1/4 (794)	1-5/8 (41)	3 (76)	30 (762)	2-1/4 (57)	4-1/4 (108)	7 (178)	2-1/2 (64)	6 (152)	14-1/4 (362)	3 (76)	30 (762)	6 (152)	294 (133)
585	30-1/2 (775)	42 (1067)	12-1/8 (308)	3-1/2 (89)	31-1/4 (794)	2-1/8 (54)	3 (76)	30 (762)	2-1/4 (57)	4-1/4 (108)	7 (178)	2-1/2 (64)	6 (152)	17-3/4 (451)	3 (76)	30 (762)	6 (152)	307 (139)
700	30-1/2 (775)	42 (1067)	13-5/8 (346)	3-1/2 (89)	31-1/4 (794)	3 (76)	4 (102)	30 (762)	2-1/4 (57)	4-1/4 (108)	7 (178)	2-1/2 (64)	6 (152)	20-1/4 (514)	3 (76)	30 (762)	6 (152)	366 (166)



A MESTEK COMPANY

Sales Office 260 North Elm Street
Westfield, Massachusetts 01085
Dial (413) 568-9571 Fax (413) 564-5661
www.vulcanrad.com

PROJECT: _____
LOCATION: _____
ARCHITECT: _____
ENGINEER: _____
CONTRACTOR: _____
PO NUMBER: _____
DATE: _____



Standard Output Units

Hot Water Performance Data

Model/ Unit Size	Water Temp Drop	Output MBH	GPM	H ₂ O Pressure Drop	Final Air Temp	Motor HP†	Motor RPM	Nominal CFM	Outlet Velocity	Sound Rating
VV-40	10°F	28.8	5.93	.37	104.6°F	1/40	1550	595	877	I
	20°F	22.7	2.34	.06	95.2°F					
	30°F	16.7	1.15	.02	85.9°F					
VV-40*	10°F	22.9	4.71	.24	108.3°F	1/40	1150	436	658	I
	20°F	18.1	1.87	.04	98.3°F					
	30°F	13.4	.92	.01	88.4°F					
VV-62	10°F	48.1	9.92	1.05	104.8°F	1/20	1550	998	1005	II
	20°F	39.6	4.08	.19	96.9°F					
	30°F	31.1	2.14	.06	89.0°F					
VV-62*	10°F	38.1	7.85	.67	109.7°F	1/20	1150	706	727	II
	20°F	31.5	3.24	.13	101.1°F					
	30°F	24.8	1.71	.04	92.4°F					
VV-77	10°F	58.7	12.11	.98	105.1°F	1/20	1550	1200	1220	II
	20°F	48.4	4.99	.18	97.2°F					
	30°F	38.1	2.62	.05	89.3°F					
VV-77*	10°F	46.5	9.59	.63	110.0°F	1/20	1150	858	894	II
	20°F	38.5	3.97	.12	101.2°F					
	30°F	30.5	2.09	.03	92.7°F					
VV-104	10°F	77.2	15.91	2.06	106.6°F	1/8	1070	1528	980	II
	20°F	68.3	7.03	.44	101.2°F					
	30°F	59.3	4.08	.16	95.8°F					
VV-104*	10°F	63.7	13.13	1.43	108.6°F	1/8	850	1208	783	II
	20°F	56.5	5.82	.31	103.1°F					
	30°F	49.2	3.38	.11	97.6°F					
VV-125	10°F	94.9	19.55	3.04	108.9°F	1/6	1100	1790	1170	III
	20°F	83.7	8.63	.65	103.1°F					
	30°F	72.5	4.98	.23	97.3°F					
VV-144	10°F	117.6	24.24	4.32	108.8°F	1/6	1100	2220	1045	III
	20°F	105.2	10.84	.96	103.7°F					
	30°F	92.8	6.38	.36	98.5°F					

Performance based on 200°F EWT, 20°F TD, 60°F EAT. Performance at 10°F & 30°F TD is also shown.

For capacities at other conditions, refer to catalog.

*Speed controller option is required for reduced ratings.

†Motor HP listed is applicable to standard motor type only. For explosion proof motor HP, see Installation Manual.

Standard Output Units

Hot Water Performance Data

Model/ Unit Size	Water Temp Drop	Output MBH	GPM	H ₂ O Pressure Drop	Final Air Temp	Motor HP [†]	Motor RPM	Nominal CFM	Outlet Velocity	Sound Rating
VV-164	10°F	132.4	27.29	3.67	106.6°F	1/6	1100	2620	1230	IV
	20°F	118.6	12.22	.81	101.7°F					
	30°F	104.8	7.20	.30	96.9°F					
VV-200	10°F	156.2	32.20	5.02	105.0°F	1/4	1100	3200	1495	III
	20°F	139.7	14.40	1.11	100.2°F					
	30°F	123.2	8.47	.41	95.5°F					
VV-237	15°F	188.9	25.95	3.92	101.8°F	1/4	1100	4162	1205	IV
	20°F	180.1	18.56	2.10	99.9°F					
	30°F	162.7	11.18	.82	96.0°F					
VV-285	15°F	215.4	29.60	5.02	104.8°F	1/2	1100	4430	1275	IV
	20°F	205.4	21.17	2.68	102.7°F					
	30°F	185.3	12.73	1.04	98.5°F					
VV-317	15°F	254.9	35.03	6.88	105.1°F	3/4	1140	5210	1500	IV
	20°F	242.9	25.03	3.67	103.0°F					
	30°F	218.9	15.04	1.42	98.7°F					
VV-367	15°F	294.7	40.49	6.60	104.2°F	3/4	1140	6140	1770	IV
	20°F	280.8	28.94	3.52	102.2°F					
	30°F	253.1	17.39	1.36	98.0°F					
VV-495	15°F	—	—	—	—	1-1/2	1160	8020	1640	IV
	20°F	368.1	37.93	5.81	102.3°F					
	30°F	333.6	22.92	2.29	98.3°F					
VV-585	15°F	451.2	62.00	8.78	104.0°F	1-1/2	1160	9450	1930	IV
	20°F	431.1	44.43	4.72	102.0°F					
	30°F	391.0	26.86	1.86	98.1°F					
VV-700	15°F	—	—	—	—	3	1165	11,000	2250	IV
	20°F	519.4	53.52	5.29	103.5°F					
	30°F	470.9	32.35	2.08	99.5°F					

Performance based on 200°F EWT, 20°F TD, 60°F EAT. Performance at 10°F & 30°F TD is also shown.
For capacities at other conditions, refer to catalog.

†Motor HP listed is applicable to standard motor type only. For explosion proof motor HP, see Installation Manual.

Standard Output Units

Steam Performance Data

Performance based on 2 Lbs steam pressure at heater with air entering @ 60°F.

Model/ Unit Size	BTU Per Hour*	Condensate Lbs Per Hour	Square Foot EDR	Final Temp	Motor HP†	Motor RPM	CFM 70°F Air Basis	Outlet Velocity	Nominal Amps at 115 VAC**	Sound Rating
VV-40	41,300	43	172	124°F	1/40	1550	595	877	1.2	I
	<i>33,600</i>	<i>55</i>	<i>140</i>	<i>131°F</i>		<i>1150</i>	<i>436</i>	<i>658</i>		
VV-62	65,500	68	273	121°F	1/20	1550	989	1005	2.1	II
	<i>52,800</i>	<i>55</i>	<i>220</i>	<i>129°F</i>		<i>1150</i>	<i>706</i>	<i>727</i>		
VV-77	80,600	83	336	122°F	1/20	1550	1200	1220	2.1	II
	<i>65,100</i>	<i>67</i>	<i>271</i>	<i>130°F</i>		<i>1150</i>	<i>858</i>	<i>894</i>		
VV-104	101,800	106	424	123°F	1/8	1070	1490	980	1.2	II
	<i>87,900</i>	<i>91</i>	<i>366</i>	<i>129°F</i>		<i>850</i>	<i>1180</i>	<i>783</i>		
VV-125	124,400	129	518	124°F	1/6	1100	1790	1170	2.3	III
VV-144	152,000	157	633	123°F	1/6	1100	2220	1045	2.3	III
VV-164	173,000	179	720	121°F	1/6	1100	2620	1230	2.3	IV
VV-200	210,200	208	838	118°F	1/4	1100	3200	1495	3.6	III
VV-237	249,800	260	1040	115°F	1/4	1100	4180	1205	3.6	IV
VV-285	283,800	294	1180	119°F	1/2	1100	4430	1275	5.4	IV
VV-317	333,400	345	1390	119°F	3/4	1140	5210	1500	N/A	IV
VV-367	386,000	400	1610	118°F	3/4	1140	6140	1770	N/A	IV
VV-495	496,000	514	2070	117°F	1-1/2	1160	8020	1640	N/A	IV
VV-585	585,000	605	2440	117°F	1-1/2	1160	9450	1930	N/A	IV
VV-700	705,000	729	2940	119°F	3	1165	11,000	2250	N/A	IV

NOTES:

Constant speed units are rated at capacities shown in regular type; capacities shown in italic faced type apply only to units with multi-speed motors.

*To determine BTU per hour capacities at various steam pressures and entering air temperatures, refer to catalog.

**Stated AMP is full load amps (FLA). Amp draw varies by motor manufacturer ± 0.2 amps. See catalog for motor data.

†Motor HP listed is applicable to standard motor type only. For explosion proof motor HP, see Installation Manual.

Low Output Units

Standard Model “VV” Units With All Air Ports Open

Hot Water Performance Data

Model/ Unit Size	Water Temp Drop	Output MBH	GPM	H ₂ O Pressure Drop	Final Air Temp	Motor HP†	Motor RPM	Nominal CFM	Outlet Velocity	Sound Rating
VV-40L	10°F	23.9	4.92	.26	92.9°F	1/40	1550	668	950	I
	20°F	18.9	1.95	.04	86.1°F					
	30°F	14.0	.96	.01	79.3°F					
VV-40L*	10°F	16.7	3.45	.13	92.8°F	1/40	1150	470	672	I
	20°F	13.5	1.39	.02	86.4°F					
	30°F	—	—	—	—					
VV-62L	10°F	41.5	8.56	.80	91.9°F	1/20	1550	1200	1190	II
	20°F	34.2	3.53	.15	86.3°F					
	30°F	27.0	1.85	.04	80.7°F					
VV-62L*	10°F	32.4	6.68	.50	94.7°F	1/20	1150	862	858	II
	20°F	26.9	2.77	.09	88.7°F					
	30°F	21.3	1.46	.03	82.8°F					
VV-77L	10°F	48.9	10.09	.69	93.2°F	1/20	1550	1360	1350	II
	20°F	40.5	4.17	.13	87.4°F					
	30°F	32.0	2.20	.04	81.7°F					
VV-77L*	10°F	38.5	7.94	.44	95.7°F	1/20	1150	995	992	II
	20°F	32.0	3.29	.08	89.6°F					
	30°F	25.4	1.75	.02	83.5°F					
VV-104L	10°F	63.7	13.13	1.43	93.5°F	1/8	1070	1752	1050	II
	20°F	56.5	5.82	.31	89.7°F					
	30°F	49.2	3.38	.11	85.9°F					
VV-104L*	10°F	54.5	11.24	1.06	93.5°F	1/8	850	1499	827	II
	20°F	48.5	4.99	.23	89.8°F					
	30°F	42.4	2.91	.08	86.1°F					
VV-125	10°F	83.7	17.24	2.40	95.4°F	1/6	1100	2180	1390	III
	20°F	73.9	7.62	.51	91.3°F					
	30°F	64.2	4.41	.18	87.1°F					
VV-144L	10°F	95.4	19.66	2.92	97.3°F	1/6	1100	2360	1080	III
	20°F	85.5	8.81	.65	93.4°F					
	30°F	75.6	5.20	.24	89.5°F					

Performance based on 200°F EWT, 20°F TD, 60°F EAT. Performance at 10°F & 30°F TD is also shown.

For capacities at other conditions, refer to catalog.

*Speed controller option is required for reduced ratings.

†Motor HP listed is applicable to standard motor type only. For explosion proof motor HP, see Installation Manual.

Low Output Units

Standard Model “VV” Units With All Air Ports Open

Hot Water Performance Data

Model/ Unit Size	Water Temp Drop	Output MBH	GPM	H ₂ O Pressure Drop	Final Air Temp	Motor HP†	Motor RPM	Nominal CFM	Outlet Velocity	Sound Rating
VV-164L	10°F	112.3	23.15	2.70	95.4°F	1/6	1100	2920	1340	IV
	20°F	100.7	10.38	.60	91.8°F					
	30°F	89.2	6.13	.22	88.1°F					
VV-200L	10°F	135.8	27.98	3.85	96.9°F	1/4	1100	3390	1560	III
	20°F	121.8	12.52	.85	93.0°F					
	30°F	107.3	7.37	.32	89.2°F					
VV-237L	10°F	168.5	34.72	6.75	94.5°F	1/4	1100	4507	1270	IV
	20°F	153.8	15.85	1.56	91.4°F					
	30°F	139.1	9.56	.61	88.4°F					
VV-285L	10°F	188.9	25.95	3.92	94.5°F	1/2	1100	5040	1420	IV
	20°F	180.1	18.56	2.10	92.9°F					
	30°F	162.7	11.18	.82	89.7°F					
VV-317L	10°F	220.9	30.35	5.26	95.7°F	3/4	1140	5700	1610	IV
	20°F	210.6	21.70	2.81	94.1°F					
	30°F	189.9	13.05	1.09	90.7°F					
VV-367L	10°F	260.7	35.82	5.24	96.4°F	3/4	1140	6600	1870	IV
	20°F	248.5	25.61	2.80	94.7°F					
	30°F	224.2	15.40	1.09	91.3°F					
VV-495L	10°F	—	—	—	—	1-1/2	1160	9380	1860	IV
	20°F	310.5	32.00	4.23	90.5°F					
	30°F	281.7	19.35	1.67	87.7°F					
VV-585L	10°F	394.4	54.19	6.83	95.3°F	1-1/2	1160	10,300	2060	IV
	20°F	377.0	38.85	3.68	93.7°F					
	30°F	342.2	23.51	1.45	90.6°F					
VV-700L	10°F	—	—	—	—	3	1165	11,900	2380	IV
	20°F	453.7	46.76	4.11	95.1°F					
	30°F	411.7	28.28	1.62	91.9°F					

Performance based on 200°F EWT, 20°F TD, 60°F EAT. Performance at 10°F & 30°F TD is also shown.
For capacities at other conditions, refer to catalog.

†Motor HP listed is applicable to standard motor type only. For explosion proof motor HP, see Installation Manual.

Low Output Units

Standard Model “VV” Units With All Air Ports Open

Steam Performance Data

Performance based on 2 Lbs steam pressure at heater with air entering @ 60°F.

Model/ Unit Size	BTU Per Hour	Condensate Lbs Per Hour	Square Foot EDR	Final Temp	Motor HP†	Motor RPM	CFM 70°F Air Basis	Outlet Velocity	Sound Rating
VV40L	34,800	36	145	108°F	1/40	1550	668	950	I
	<i>26,000</i>	<i>27</i>	<i>108</i>	<i>111°F</i>		<i>1150</i>	<i>470</i>	<i>672</i>	
VV62L	57,200	59	238	104°F	1/20	1550	1200	1190	I
	<i>45,800</i>	<i>48</i>	<i>191</i>	<i>109°F</i>		<i>1150</i>	<i>862</i>	<i>858</i>	
VV77L	68,000	71	283	106°F	1/20	1550	1360	1350	II
	<i>55,000</i>	<i>57</i>	<i>229</i>	<i>111°F</i>		<i>1150</i>	<i>995</i>	<i>992</i>	
VV104L	85,400	89	356	108°F	1/8	1070	1640	1050	II
	<i>71,200</i>	<i>74</i>	<i>296</i>	<i>111°F</i>		<i>850</i>	<i>1290</i>	<i>827</i>	
VV125L	111,000	115	462	107°F	1/6	1100	2180	1390	III
VV144L	125,000	130	524	109°F	1/6	1100	2360	1080	III
VV164L	149,000	154	620	107°F	1/6	1100	2920	1340	IV
VV200L	176,800	183	736	108°F	1/4	1100	3390	1560	III
VV237L	214,900	224	895	104°F	1/4	1100	4500	1270	IV
VV285L	251,800	260	1050	106°F	1/2	1100	5040	1420	IV
VV317L	291,000	302	1210	107°F	3/4	1140	5700	1610	IV
VV367L	344,000	356	1430	108°F	3/4	1140	6600	1870	IV
VV495L	428,000	446	1785	102°F	1-1/2	1160	9380	1860	IV
VV585L	515,000	533	2140	106°F	1-1/2	1160	10,300	2060	IV
VV700L	620,000	642	2580	108°F	3	1165	11,900	2380	IV

NOTES:

Constant speed units are rated at capacities shown in regular type; capacities shown in italic faced type apply only to units with multi-speed motors.

To determine BTU per hour capacities at various steam pressures and entering air temperatures, refer to catalog.

†Motor HP listed is applicable to standard motor type only. For explosion proof motor HP, see Installation Manual.

MAXIMUM MOUNTING HEIGHT IN FEET FOR MODEL "VV" UNIT HEATERS WITH AND WITHOUT LOUVER CONE DIFFUSER

Model/Unit Size	Steam Pressure (PSI)					Model/Unit Size	Steam Pressure (PSI)				
	2	5	10	50	75		2	5	10	50	75
VV-40	10.5 12.5	10.0 12.0	10.0 12.0	9.0 11.0	8.0 10.0	VV-144L	18.0 22.5	17.5 22.0	17.5 21.5	15.0 18.5	14.0 18.0
VV-40*	8.0 9.0	8.0 8.5	8.0 8.5	8.0 8.0	8.0 8.0	VV-164	18.0 22.5	17.5 22.0	17.0 21.5	14.5 19.0	14.0 18.0
VV-40L	12.5 14.5	12.0 14.0	12.0 13.5	10.5 12.0	9.5 11.5	VV-164L	22.0 27.5	21.5 27.0	21.0 26.5	18.5 23.5	17.5 22.5
VV-40L*	9.0 10.5	8.5 10.0	8.5 10.0	8.0 9.0	8.0 8.5	VV-200	22.0 27.5	21.5 27.0	21.0 26.5	18.5 24.0	17.5 23.0
VV-62	12.0 14.5	11.5 14.0	11.5 14.0	10.0 12.0	9.5 11.5	VV-200L	25.5 31.5	25.0 31.0	24.5 30.5	22.0 27.0	21.0 26.0
VV-62*	9.5 11.5	9.0 11.0	9.0 11.0	8.0 9.5	8.0 9.0	VV-237	20.0 25.0	19.5 24.0	19.0 23.5	17.0 20.5	16.0 19.5
VV-62L	15.0 19.0	14.5 18.5	14.5 18.5	12.5 16.5	12.0 16.0	VV-237L	24.0 29.5	23.5 28.5	23.0 28.0	20.0 24.5	19.0 23.5
VV-62L*	11.5 14.0	11.0 13.5	11.0 13.5	9.5 12.0	8.0 11.5	VV-285	21.0 26.0	20.5 25.5	20.0 25.0	17.5 22.0	17.0 21.0
VV-77	15.0 18.5	14.5 18.0	14.0 17.5	12.0 15.5	11.5 13.5	VV-285L	25.5 32.0	25.0 31.0	24.5 30.0	21.0 26.0	20.0 25.0
VV-77*	11.0 13.5	10.5 13.0	10.5 13.0	9.0 11.5	8.5 11.0	VV-317	24.0 30.0	23.0 29.0	22.0 28.0	20.0 25.0	19.0 24.0
VV-77L	18.0 22.0	17.5 21.0	17.5 21.0	15.0 19.0	14.0 18.0	VV-317L	29.0 36.0	28.5 35.0	28.0 34.0	25.0 30.0	24.0 29.0
VV-77L*	13.0 17.0	12.5 16.5	12.0 16.0	11.0 14.0	10.5 13.5	VV-367	28.5 35.5	28.0 35.0	27.5 34.0	24.0 30.0	23.0 29.0
VV-104	14.0 17.0	13.5 16.5	13.0 16.0	11.5 14.0	11.0 13.5	VV-367L	32.5 41.0	31.5 40.0	30.5 39.0	27.5 35.0	26.5 33.5
VV-104*	11.0 13.5	10.5 13.0	10.5 13.0	9.5 12.0	9.0 11.5	VV-495	29.5 36.5	29.0 36.0	28.5 35.5	25.0 32.0	24.0 30.5
VV-104L	17.5 21.5	17.0 21.0	16.5 20.5	15.0 18.5	14.5 17.5	VV-495L	35.0 43.5	34.0 42.5	33.0 41.5	29.0 35.0	28.0 34.0
VV-104L*	15.0 18.5	14.5 18.0	14.5 18.0	13.0 16.0	12.5 15.0	VV-585	34.0 42.5	33.0 41.5	32.0 40.5	28.0 36.0	27.0 34.5
VV-125	16.0 19.5	15.5 19.0	15.5 18.5	14.0 17.0	13.5 16.0	VV-585L	37.0 46.5	36.0 45.5	35.0 44.5	31.0 39.0	30.0 37.0
VV-125L	21.0 26.0	20.5 25.5	20.0 25.0	17.5 22.5	17.0 21.5	VV-700	38.5 48.0	37.5 47.0	36.5 46.0	32.0 40.0	30.5 39.0
VV-144	15.5 19.0	15.0 18.5	14.5 18.0	13.0 16.0	12.0 15.5	VV-700L	42.5 53.0	41.5 52.0	40.5 51.0	35.0 44.0	33.5 42.0

NOTES:

* = Low Speed

L = Model "VV" low output model with all air ports open

Figures in bold face show maximum mounting height with louver cone diffusers set vertically.

To meet ETL and OSHA requirements, units mounted below 8 feet from floor must be equipped with an OSHA fan guard. Vertical unit heaters can support either an OSHA fan guard or the louver cone diffuser - both items cannot be installed on the same unit. Please see catalog for ordering information.

Above table based on 60°F entering air temperature. In providing for the use of diffusers, it must be remembered that adjustment of a LCD to deflect air toward horizontal immediately lowers the mounting height limit.

See catalog for mounting height correction factors.

**FIGURE C
CONE DIFFUSER ROUGHING-IN DIMENSIONS**

Unit Size	A	B	C	D	No of Louvers
40	16 ¹ / ₂	14 ¹ / ₄	6 ¹ / ₂	2 ⁵ / ₈	8
62 & 77	20	17	8	3 ¹ / ₈	8
104 & 125	24 ¹ / ₄	21	9 ³ / ₄	3 ¹⁵ / ₁₆	8
144, 164 & 200	28 ³ / ₈	24 ³ / ₄	11 ¹ / ₂	4 ⁵ / ₈	8
237, 285, 317 & 367	35 ¹ / ₂	31 ¹ / ₂	13 ³ / ₄	4	12
495, 585, 700	41 ¹ / ₂	37 ¹ / ₄	17	4 ³ / ₄	12

