# ARROW

## EXTRUDED ALUMINUM GRILLE SCREEN
## ANGULAR CONTINUOUS LINE

# TYPE AG-2CL

### MODULAR GRILLE SCREEN - STATIONARY




OPTIONAL FRAMES



CHANNEL FRAME

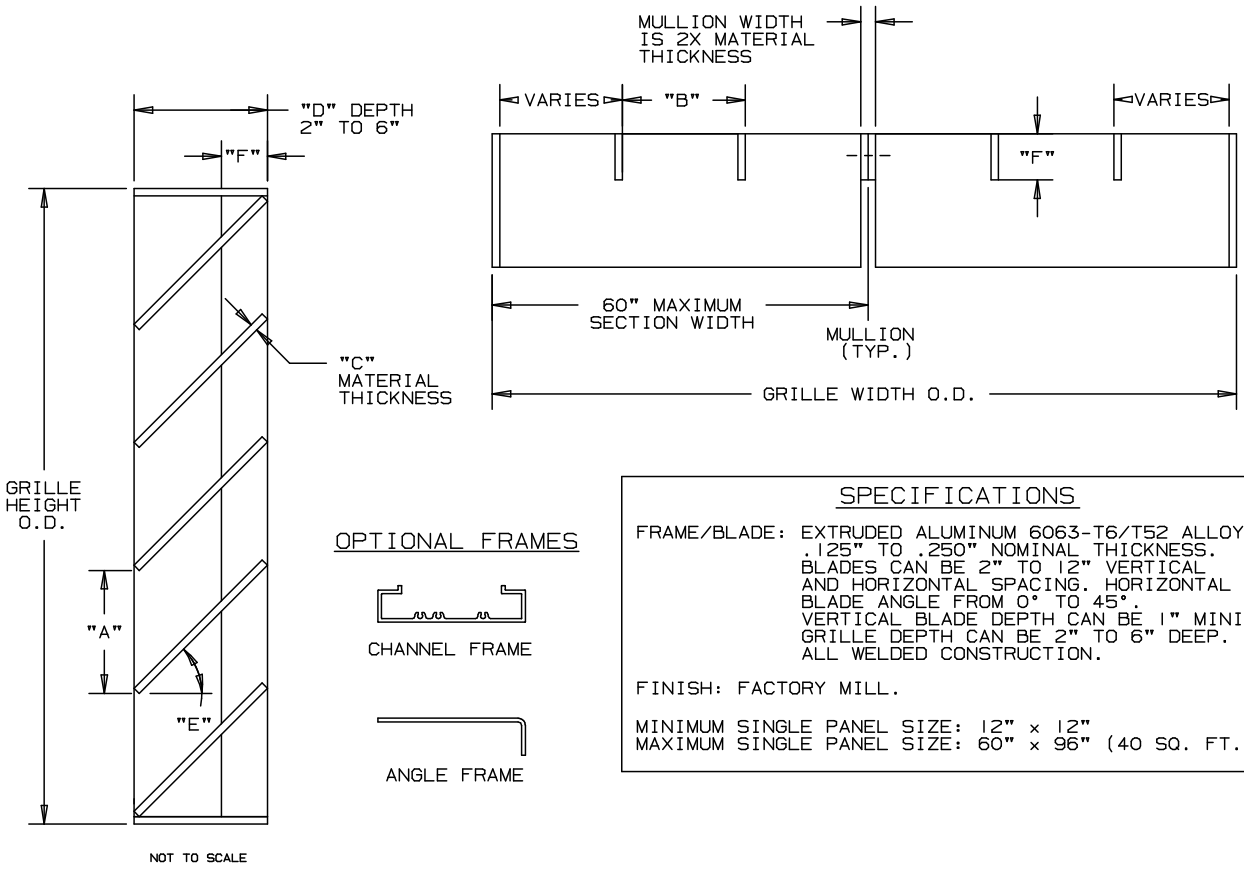

ANGLE FRAME

### SPECIFICATIONS

FRAME/BLADE: EXTRUDED ALUMINUM 6063-T6/T52 ALLOY, .125" TO .250" NOMINAL THICKNESS. BLADES CAN BE 2" TO 12" VERTICAL AND HORIZONTAL SPACING. HORIZONTAL BLADE ANGLE FROM 0° TO 45°. VERTICAL BLADE DEPTH CAN BE 1" MINIMUM. GRILLE DEPTH CAN BE 2" TO 6" DEEP. ALL WELDED CONSTRUCTION.

FINISH: FACTORY MILL.

MINIMUM SINGLE PANEL SIZE: 12" x 12"
MAXIMUM SINGLE PANEL SIZE: 60" x 96" (40 SQ. FT.)

"A" = 2" TO 12" (HORIZONTAL BLADE SPACING)
"B" = 2" TO 12" (VERTICAL BLADE SPACING)
"C" = .125" TO .250" (MATERIAL THICKNESS)
"D" = 2" TO 6" (GRILLE DEPTH)
"E" = 0° TO 45° (BLADE ANGLE)
"F" = 1" MINIMUM (VERTICAL BLADE DEPTH)

SHEET METAL WORKERS' INTERNATIONAL ASSOCIATION
UNION MADE

NOMINAL DEDUCTIONS WILL BE MADE TO OPENING SIZES GIVEN.

| | | | | | | | | | | | | |
|---|---|---|---|---|---|---|---|---|---|---|---|---|
| | | | | | | | | | | | | |
| | | | | | | | | | | | | |
| | | | | | | | | | | | | |
| | | | | | | | | | | | | |
| ITEM | QTY. | WIDTH | HEIGHT | WIDTH | HEIGHT | MULL. | "A" | "B" | "C" | "D" | "E" | "F" |
| | | OPENING SIZE | | GRILLE SIZE (O.D.) | | | | | | | | |


ARROW UNITED INDUSTRIES
A DIVISION OF MESTEK, INC.
450 RIVERSIDE DRIVE
WYALUSING, PA 18853
TEL:(570)746-1888 FAX:(570)746-9286
WEB ADDRESS: WWW.ARROWUNITED.COM


AGENT: _____

ARCH./ENG.:

CONTR.:

PROJECT:

EDR: ECN: JOB:

DATE: DWN.: DWG.: